


SIOBLAST MIT



SETUP GUIDE

FRONT SUSPENSION



Shock position



Upper arm position

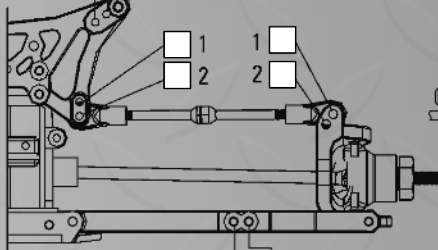


Caster angle
 Standard: 10°
 Option: 4°



Front shock


Oil: _____
 Pistons: _____
 Spacer: _____
 Springs: _____

Toe angle



Front toe angle _____
 Notes _____
 Rear toe angle _____
 Notes _____

Camber angle




Camber front _____
 Notes _____
 Camber rear _____
 Notes _____

Rideheight front _____
 Rideheight rear _____


REAR SUSPENSION

Shock position






Wheelbase adjustment

Rear _____ mm



Front _____ mm

Upper arm position

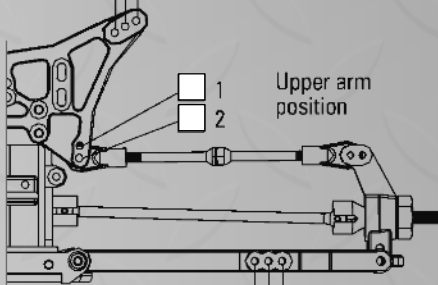

Rear shock

Oil: _____
 Pistons: _____
 Spacer: _____
 Springs: _____

Tire

Front	Rear
Type: _____	Type: _____
Foam: _____	Foam: _____

Motor: _____	Battery: _____
Spur Gear: _____	ESC: _____
Pinion Gear: _____	Servo: _____

Track conditions

Size:	<input type="checkbox"/> Open	<input type="checkbox"/> Med	<input type="checkbox"/> Tight
Traction:	<input type="checkbox"/> High	<input type="checkbox"/> Med	<input type="checkbox"/> Low
Surface:	<input type="checkbox"/> Smooth	<input type="checkbox"/> Med	<input type="checkbox"/> Bumpy

Diff Oil

Front: _____
 Rear: _____

Comment

Name: _____
 Date: _____
 Track: _____